



## INSTALLATION INSTRUCTIONS AND TEMPLATE

### GOLF CAR MOUNT

1. Position template on either rear fender of golf car.
2. Mark location of 5 template holes to be drilled in golf car fender.
3. Place Club Clean® on fender to insure position is acceptable before drilling.
4. Mount unit with club side towards rear of golf car.
5. Check below fender to insure drill will not damage any part of golf car. (i.e. gas line, wiring, tire, etc.)
6. Using 1/4" drill bit, drill 5 template holes as marked on sheet.
7. From hardware package provided take 5, 1-1/4" screws with washers and screw up through underside of fender into Club Clean® unit as shown on right.
8. Excessive tightening of screws will cause screws to strip.


**DO NOT OVERTIGHTEN.**



Mark & Drill



Mark & Drill

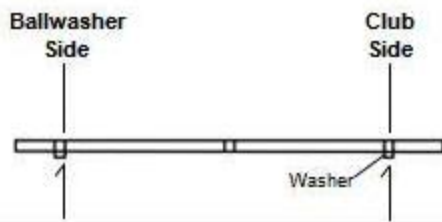

### BRACKET MOUNT (OPTIONAL)

Club Clean can mount on left or right side of car at fender. Bracket attaches to horizontal, vertical or angled basket post, or frame post of golf car.

#### STEP 1. Insert Bolts Into Mounting Plate

**FOR HORIZONTAL POST** Insert (2) bolts provided into holes H1 and H2 as shown in diagram 1.

**FOR VERTICAL POST** Insert (2) bolts into holes V2 and V3 as shown in diagram 2: This centers plate in front of post. To move plate further forward or further back, use holes V1 and V2 or holes V3 and V4. This will position Club Clean® more forward or more back on fender. Find best position for your car.

**FOR ANGLED POST** Use 2 Horizontal (H holes) or any 2 Vertical (V holes) to find best position for plate on your car.

#### STEP 2. Attach Club Clean To Mounting Plate

Use (4) 1-1/4" screws with washers provided as shown in diagram 1.

**NOTE:** Excessive tightening of screws will cause screws to strip.

**DO NOT OVERTIGHTEN**

**NOTE:** Drain plug should face back of golf cart.

#### STEP 3. Secure Bracket to Post

Keeping unit raised 1" to 1-1/2" of fender, fit bolts around post (Horizontal, Vertical or Angled).

Attach bracket and tighten nuts securely.

Diagram 4 shows example of vertical post mount:

**NOTE:** For best draining results, before securing bracket, tilt Club Clean® slightly towards drain plug. Then tighten securely.

Step 1 Diagram 1



Horizontal Post Mount

Diagram 2



Vertical Post Mount




Mark & Drill




Mark & Drill

Step 2 Diagram 3

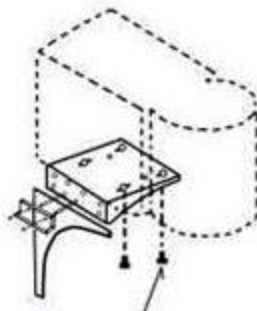

4 Screws Provided

Step 3 Diagram 4

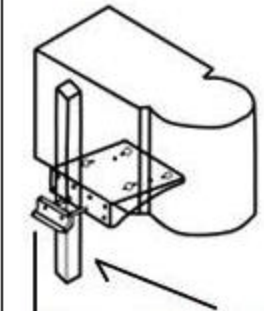

Bracket Vertical Post



Mark & Drill

## **SUCTION CUP MOUNT (OPTIONAL)**

1. Place cup on a flat surface upside down so bell opening is facing up. Next, place a screw on a phillips head screwdriver and find the center of the cup. Start screw in center of cup ensuring the screw is going in straight. Once the screw has penetrated the top of the cup, place the screw tip in the screw hole in the bottom of the unit and continue to tighten. Tighten only until the suction cup seats itself firmly inside the screw hole. Repeat with the other two cups, one in the front and two in the rear.
2. The surface for suction cups must be clean, smooth and dry for proper suction. Suction cups will not stick to porous or dirty surfaces.
3. Slightly moisten the edge of the suction cups. Press unit hard onto surface. Over wetting the suction cups will cause the unit to slide. If this happens, dry the cups, moisten the edges only and reapply.

## **FILLING THE CLUB CLEAN® UNIT**

1. Fill the unit with approximately 2 quarts of water (about 2/3 full). Do not overfill.
2. Add approximately 1/2 oz. Concentrated Cleaning Solution for increased performance.

## **DRAINING THE CLUB CLEAN® UNIT**

1. Remove the drain plug and flush the unit completely with fresh water. (Place hose in club side and flush)
2. Reinsert the drain plug after cleaning, then follow filling instructions above.

## **MAINTENANCE**

To keep your Club Cleaning looking good for years we recommend the following: 1. Rotate the club brushes once every 6 months to prevent one side from wearing more than the other. 2. Clean the unit frequently with soap and water using a sponge to remove excess grime.

## **CLUB CLEAN LIMITED LIFETIME WARRANTY**

This quality Club Clean® product is made of superior durable, high impact materials. It is resistant to extreme heat and extreme cold. The case and lid are warranted against manufacturers defects in materials and workmanship for the useful life of the product or parts will be replaced free of charge.

Under normal user conditions, Club Clean® quality constructed parts and simplistic functional design will provide years of dependable trouble free service. Normal wear parts (brushes and gasket) while constructed from the finest materials to insure quality service under normal usage, are expressly excluded from the warranty. However, replacement brushes and gasket are available from Club Clean® LLC. Please direct any inquiries or replacement part orders to our address below.

Club Clean® LLC  
Service Department  
248 Alt 19, Suite A  
Palm Harbor, FL 34683  
[www.ClubClean.net](http://www.ClubClean.net)  
Tel 1.727.518.9773